

# FLIFT

AMERICA

# GAMBITs

LPG

Well Equipped starting @ \$34778






# "S" STANDS FOR SUPERIOR

ALL Gambit-S models are crafted with our exclusive perimeter frame, floating cab design, allowing the cockpit and ROPS to move independently from the chassis. Thus, reducing vibration as much as 15% when compared to our competitors.

General		Model	4400P	5500P	6600P	7700P		
Power Type			LPG	LPG	LPG	LPG		
Rated Capacity		lbs	4400	5500	6600	7700		
Load Center		in	20	20	20	20		
Lift Height (S450)		in	177	177	177	177		
Fork Size	LxWxT	in	60x5x1.5	60x5x1.5	60x5x1.75	60x5x1.75		
	Mast Tilt Angle	Deg	6/12	6/12	6/12	6/12		
Front Overhang (Wheel Center to fork face)		in	18	18	19	19		
Ground Clearance (Bottom of mast)		in	4	4	5.5	5.5		
Overall Dimension	Length to face of fork(Without fork)	in	102	102	107	109		
	Overall Width	in	45	45	48	48		
	Mast Lowered Height	in	81	81	85	85		
	Free lift distance	in	4	4	5	5		
	Mast Extended Height(With backrest)	in	219	219	223	223		
Overhead Guard Height		in	84	84	85	85		
Turning Radius(outside)		in	90	90	95	97		
Min. intersecting aisle		in	94	94	98	100		
Min. right angle stacking aisle width		in	157	157	162	164		
Performance	Speed	Max. Travel Speed	mph	12	12	13	13	
		Lifting Speed (full load/no load)	in/s	21/23	21/23	20/22	17/19	
		Lowering Speed (Full load/no load)	in/s	≤24/≥12	≤24/≥12	≤24/≥12	≤24/≥12	
Max. Gradeability		%	20	20	20	20		
Chassis	Tire	Front		7.00-12-12PR	7.00-12-12PR	28*9-15-14PR	28*9-15-14PR	
		Rear		6.50-9-10PR	6.50-9-10PR	6.50-10-10PR	6.50-10-10PR	
Wheel Base		in	63	63	67	67		
Service Weight		lbs	8135	8575	9700	10141		
Power & Transmission	Battery	Voltage/Capacity		V/Ah	12/80	12/80	12/80	12/80
		Model			2.4	2.4	2.4	2.4
	Engine	Manufacturer		PSI	PSI	PSI	PSI	
		Rated output/r.p.m.		hp	63/2700	63/2700	63/2700	63/2700
		Rated torque/r.p.m.		ft-lbs	124/2400	124/2400	124/2400	124/2400
		No. of Cylinder			4	4	4	4
		BorexStroke		mm	86.5x100	86.5x100	86.5x100	86.5x100
		Displacement		L	2.4	2.4	2.4	2.4
	Fuel Tank Capacity		gal	16	16	16	16	
	Transmission	Type			Hydraulic	Hydraulic	Hydraulic	Hydraulic
stage		FWD/RVS		1/1	1/1	1/1	1/1	
Operating Pressure for Attachment		Mpa	18	18	18	18		

## DEALER CONTACT

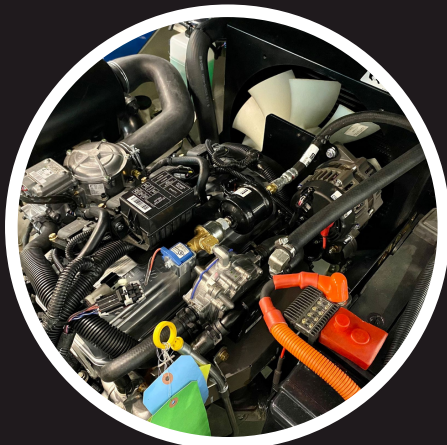

### WHY FLIFT?

- 100+ LPG MODEL CONFIGURATIONS
- STANDARD SIDE SHIFT
- PSI 2.4L LP ENGINE
- SELECTABLE CAPACITY
- SELECTABLE COLOR(S)
- SELECTABLE MAST
- SELECTABLE FORK SIZE
- SELECTABLE PNEUMATIC OR SOLID TIRES
- OPTIONAL CAB W/ HEAT & AIR
- OPTIONAL DUAL WHEEL
- OPTIONAL FORK POSITIONER
- INDUSTRY BEST (STD) WARRANTY

